KT-LCD6 e-Bike Display User Manual


V2.0

Dear customer, please read this manual before you use KT-LCD6 Display. The manual will guide you use the instrument correctly to achieve a variety of vehicle control and vehicle status displays.

Functions and Display

designed separately.

Instruments using the structure form of instrument body portion and the operation buttons are



1	\square	UP button	9	Mil	Distance (imperial)
2		SW button		DST	Trip distance
3		DOWN button		ODO	Total distance
4		Battery capacity indicator		VOL	Battery voltage
5	тм	Single trip time	10	١	Backlight and headlights
	ттм	Total trip time	11	Q	The brake display
6	км/н	Riding speed(metric)	12	CRUISE	Cruise function display
	МРН	Riding speed (imperial)		PAS	PAS starting display
	MXS	MAX speed		THROTTLE	Turned on throttle
	AVS	Average speed	13	Ŕ	6KM/H push power assist
7	ASSIST	Pas level	14	мото ћ С	Motor temperature
8	×	CADENCE display		MOTOR W	Motor Power
	КМ	Distance(metric)	15	ቸሮ	Environment temperature

Operation

1. ON/OFF

Hold button long to turn on the power, and hold long for a second time to turn off the power. When the motor stops driving and when the e-bike is not used for a consecutive 5 minutes, it will automatically shut down and turn off the motor power supply.

2. Display 1




Hold 🔟 button long to start up and enter display 1.

2.1 Turn on backlight and headlights



Hold button long to turn on backlight and headlights (the controller should have headlight drive output function); hold long again to turn off the backlight and headlights.

2.2 Assist ratio gear (ASSIST) switch



Hold A or button shortly to switch 0-5 file gear. Gear 1 is for the minimum power, gear 5 is for the highest power. Each startup will automatically restore the gear shutdown last time (the user can set randomly). Gear 0 is

without booster function.

2.3 **6KM/H** power assistant push function




Hold \square button and $\mathring{\land}$ flashes, the vehicle drives at the speed not more than 6Km /h. Release \square button, the function is invalid.

2.4 Cruise function(CRUISE)




After the cruise function is turned on, the trip riding speed is greater than 7 km/ h, hold **v** button long and enter cruise, the CRUISE lit. Brake or hold any button to cancel.

2.5 Turned on throttle (THROTTLE)




Turned on throttle, the display interface shows THROTTLE.

2.6 Power-assist startup



When the booster riding, the display interface shows PAS.

2.7 Cadence function display



In the assistance mode, the display will show the pedal's Revolutions Per Minute (RPM).

2.8 Brake status display



When the brake, the brake state is displayed

2.9 Battery Capacity Indicator




The meter can automatically identify 24V, 36V, 48V battery capacities when it is supporting use with the specified controller. When the battery capacity is over 70%, the four power displays of the meter are lit, when the

battery capacities drop, the four power displays are off in order, when the power capacity is less than

15%, the four power displays are totally turned off. When the controller is power off due to voltage shortage, the power display frame flashes, indicating the vehicle has been in voltage shortage and waiting for shutdown currently.

3.0 Display and delete of single data




After power on for 5 seconds, hold \square and \square at the same time, single trip riding time (TM) and single trip distance (DST) flash, hold 🔟 button shortly, the content of both is cleared. If failed holding the button within 5 seconds, it will automatically return the display interface after 5 seconds, original content is preserved.

3. Display 2 automatically jump to display 3


. км/н

27



Hold button shortly in display 1 to enter display 2. In the riding mode after 5 seconds, display 2 automatically jump to display 3.

4. Display 4 automatically jump to display 5



Hold button shortly in display 2 to enter display 4. In the riding mode after 5 seconds, display 4 automatically jump to display 5.

5. Hold 🔟 button shortly in display 4 or 5 to enter display 3.

6. In each display interface, if you hold with button long, the meter will be powered-off together with that of the controller.

7. Automatically prompt interface

7.1 Error Code Display Error Code




01 info Throttle Abnormality Motor hall signal Abnormality 03 info 05 info Axis speed sensor Abnormality(only applied to torgue sensor) 06 info Motor or controller has short circuit Abnormality Electronic control system failure will display (flashing) fault code. Once the

fault was removed, it automatically exits from the fault code display interface.

7.2 Motor temperature alarm

When the motor temperature (the internal motor should be equipped with the temperature sensor and the output of temperature detection signal) is over the warning value, MOTOR \degree C (°F) flashes to alarm at any display, meanwhile the motor controller will offer the appropriate protection to motor.

Outline Drawings and Dimensions

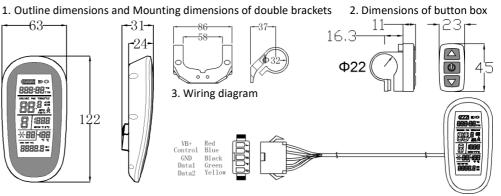

Definition